

7.2 INSUL-RIB™




The **7.2 Insul-Rib™** insulated metal wall panel combines a traditional 7.2 rib panel design with a polyurethane foam core. This widely used profile is available as an insulated panel in various thicknesses.

The 7.2 Insul-Rib™ panel has a standard FM Approved Class 1 foam core and offers excellent insulating values. The metal and foam composite construction creates a rigid panel far stronger than the individual parts. This increases the span capability of the panel and reduces the need for secondary structural components.

FEATURES AND BENEFITS

- Panels are lightweight and quick to install, significantly reducing construction time.
- A double tongue-and-groove offset side joint permits concealed fastening.
- Consistent insulating values are achieved with built-in thermal breaks, saving energy.

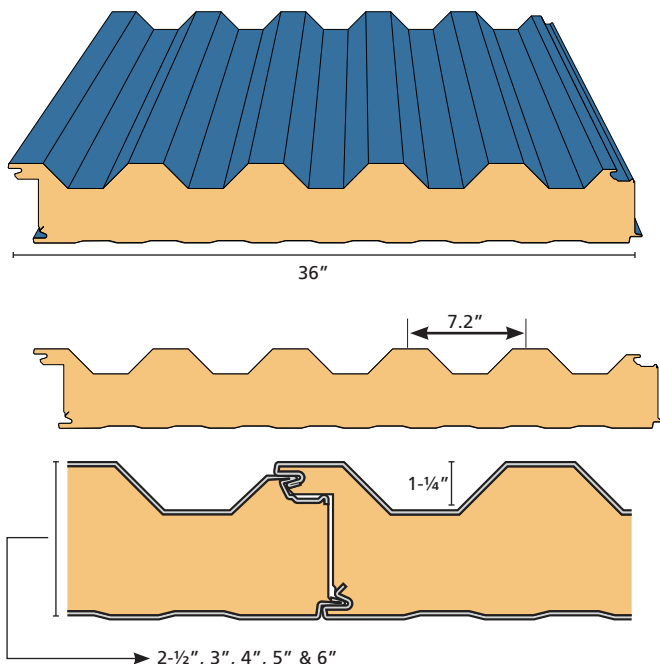

USES AND APPLICATIONS

In new and retrofit construction, 7.2 Insul-Rib™ wall panels are ideally suited for:

ARCHITECTURAL

- Airport Terminal Buildings
- Arenas
- Convention Centers
- Hospitals
- Low and Mid-Rise Offices
- Performing Arts Centers
- Schools & Universities
- Worship Facilities

COMMERCIAL & INDUSTRIAL

- Distribution Centers
- Equipment Maintenance Buildings
- Hangars
- Manufacturing Facilities
- Retail Buildings
- Self-Storage Complexes
- Utility Buildings
- Warehouses
- Utility Buildings

Note: Not intended for exterior walls on cold storage buildings.

7.2 INSUL-RIB™

MATERIAL SPECIFICATIONS			
EXTERIOR PROFILE	7.2" on-center rib pattern, 1-1/2" deep.		
INTERIOR PROFILE	Mesa nominal 1/8" deep; Light Mesa nominal 1/16" deep		
FOAM CORE	Foamed-in-place, Non-CFC & zero ODP polyurethane, Factory Mutual Class 1 approval.		
THERMAL VALUE	R VALUE WITH AIR FILM		73° MEAN
		2-1/2" PANEL	8.80
		3" PANEL	12.17
		4" PANEL	18.49
		5" PANEL	25.15
		6" PANEL	31.74
	1. R-Values include the air films on each side of the panel. 2. 73° Mean based on ASTM C1363 Thermal Testing.		
MODULE WIDTH	36"		
PANEL THICKNESS	2-1/2", 3", 4", 5" 6" (Includes rib height)		
PANEL LENGTHS	Standard 8'-0" to 40'-0"		
EXTERIOR FACINGS	Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga. 24 Ga. and 22 Ga.		
INTERIOR FACINGS	Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga. and 22 Ga.		
EXTERIOR FINISHES & COLORS	Siliconized Polyester, Fluoropon® Full-Strength 70% PVDF Fluoropolymer Coating. Note: Prices may vary by color, gauge and quantity of metal.		
INTERIOR FINISHES & COLORS	USDA-compliant Polyester, Igloo White. USDA-compliant PVC Plastisol White		
PANEL JOINT	Offset double tongue-and-groove with extended metal shelf for positive face fastening.		
FASTENING	Fastener & Clip concealed in the side joint.		
FM Approved Class 1 with no height restrictions.			

TESTS AND CERTIFICATIONS			
		Standard	Standard / Test Description
US Certifications	Fire Performance	FM Approval Standard 4880	Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels
		NFPA 259	Test Method for Potential Heat of Building Materials
		NFPA 285	Evaluation of Fire Propagation Characteristics of Exterior Non- Load-Bearing Wall Assemblies
		NFPA 286	Fire Tests for Evaluating Contribution of Wall and Ceiling Finish to Roof Fire Growth
		ASTM E84	Surface Burning Characteristics of Building Material
		FM Approval Standard 4881	Class 1 Exterior Wall Structural Performance
	Structural Performance	ASTM E72	Strength Tests of Panels for Building Construction
		ASTM E330	Structural Performance of Exterior Curtain Walls by Uniform Static Air Pressure Differences
		ASTM E283	Rate of Air Leakage Through Curtain Walls Under Specified Pressure Differences
	Vapor Barrier Performance	ASTM E331	Water Penetration of Exterior Walls by Uniform Static Air Pressure Differences
		ASTM C518	Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus
	Thermal Performance	ASTM C1363	Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus
		Special Approvals	City of Los Angeles
	Miami-Dade Wall		Miami-Dade County Product Control Approved (Note: WACC Vertical Installation Only) NOA No. 13-0212.06, Expiration Date: 03/06/2018
	Canadian Certifications	Fire Performance	CAN/ULC S101
CAN/ULC S102			Surface Burning Characteristics of Building Materials and Assemblies
CAN/ULC S138			Fire Growth of Insulated Building Panels in a Full-Scale Room Configuration

Load span tables and notes are available at RobertsonBuildings.com

Robertson Building Systems reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. For current product information, inquire or visit RobertsonBuildings.com. Application details are for illustration purposes only and may not be appropriate for all conditions, building designs or panel profiles. If there is a conflict between the preceding and project erection drawings, the erection drawings will take precedence.



Corporate Office | 1343 Sandhill Dr., Ancaster, ON L9G 4V5
| 800-387-5335, 905-304-1111, f 905-304-2420

Western Office | 11318-163 St. NW, Edmonton, AB T5M 1Y6
| 780-485-3055, f 780-461-7785

RobertsonBuildings.com